


West End Trunk Line Microtunnel Project Coatesville, PA



PROJECT OVERVIEW AND CHALLENGES

To increase capacity and replace an aging sewer pipeline through the Arclermittal Steel facility in Coatesville, PA, Pennsylvania American Water needed to construct a new 30" gravity sewer that would not pass down the plant's main thoroughfare. Bradshaw Construction was contracted to build the trenchless portion this new line parallel to Valley Road. The 1,017' long tunnel was constructed in a single drive as the tunnel depths, up to 55', as well as work zone and no-blasting restrictions limited the ability to install any more than the launch and recovery shafts. Those liner plate shafts, up to 30' deep, were excavated through the limestone by only hammering the rock. Bradshaw then installed the 59" diameter steel casing and then 30" PVC as the final carrier pipe for the sewer pipeline. The gravity sewer was completed well within the alignment tolerances, ready to be incorporated into the sewer system.

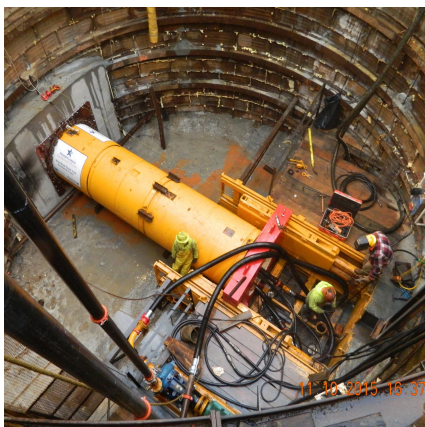

PROJECT INFORMATION - 553

OWNER:

Pennsylvania American Water
Company
Jerry DeBalko
484-855-1006
Gerald/DeBalko@amwater.com

ENGINEER:

Hatch, Mott, & MacDonald
Jason Marie
215-399-9595
Jason.Marie@hatchmott.com

CONTRACTOR:

Bradshaw Construction Corporation

CONTRACT VALUE:

2,937,000.00

COMPLETION DATE:

3/25/2016

GEOLOGY:

Very Hard to Weathered Limestone

EXCAVATION METHOD:

Herrenknecht AVN-1200 MTBM

MINING DIMENSIONS:

1017' x 59" Ø

FINAL LINING:

30" Polyvinyl Chloride Pipe

FOR MORE INFORMATION:

Todd Brown, Project Manager
410-970-8300
tbrown@bradshawcc.com
Refer to Project 553